
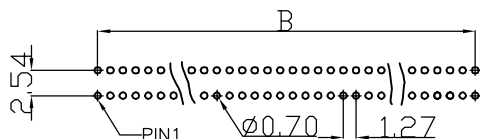







THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE

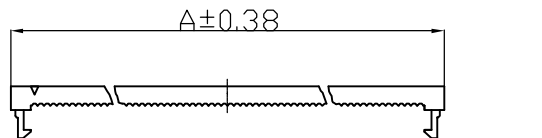

ECOMMENDED P.C.B LAYOUT  
TOLERANCE ±0.05  
TOP VIEW

A=(TOTAL NO. OF PINS/2)X1.27+4.32  
=(TOTAL NO. OF PINS/2)X0.050+0.170  
B=(TOTAL NO. OF PINS/2-1)X1.27  
=(TOTAL NO. OF PINS/2-1)X0.050

MATERIALS

1. HOUSING : THERMOPLASTICS(UL94V-0)
2. TERMINAL : COPPER ALLOY,(t=0.30mm)

SPECIFICATION

1. CURRENT RATING :1A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -40°C TO +85°C.



Ordering Information

123a -  $\frac{XX}{a} \frac{X}{b} \frac{X}{c}$

- a: No. Of Pins  
b: Contact Plating  
0: Gold flash selective gold(standard)  
1: 5u' selective gold on contact  
2: 10u' selective gold on contact  
3: 15u' selective gold on contact  
4: 30u' selective gold on contact  
5: 50u' selective gold on contact  
6: Gold flash full gold  
t: tin(bright tin)

- c:Insulator Color  
0: Black(standard)  
1: Gray04(Light)

DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> MM ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		 <b>Y-S ELECTRONIC CO., LTD.</b> No. 101, Sec. 1, Long-An Street, Lu-Chu, Taoyuan, Taiwan, R.O.C. TEL: +886-3-3609819 FAX: +886-3-3609817
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS      ANGLES X: ±0.38 [0.015]   X° ±3° .X ±0.25 [0.010]   .X° ±1.0° .XX ±0.13 [0.005]		CHECKED BY AND DATE JUSTIN XING 03-21-08		
MATERIAL		APPROVED BY AND DATE MICHAEL HUANG 03-21-08		DRAWING NO. 123a-XXXX
FINISH		THIRD ANGLE PROJECTION 		
SCALE: 2 : 1		SIZE: A3		FILE NO.: SHEET 1 OF 1