





THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT



REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE





A TYPE





B TYPE





C TYPE

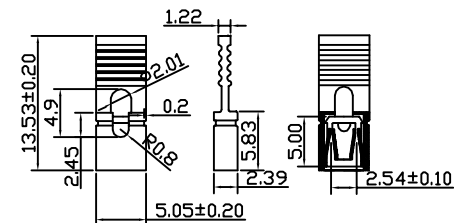

D TYPE

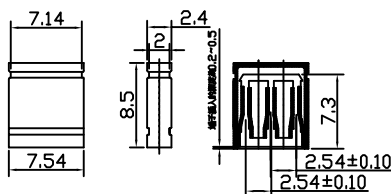

E TYPE

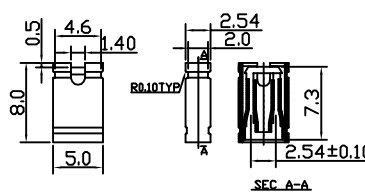

F TYPE

NOTES

1.MATERIAL

- 1.1 Insulator:PBT+ 25% Glass Fiber UL-94V-0
- 1.2 Contact: Phosphor Bronze

2.SPECIFICATION

- 2.1 Current Rating: 3AMP
- 2.2 Dielectric Strength: 500V AC
- 2.3 Insulator Resistance: 1000M ohms Min
- 2.4 Contact Resistance: 20m ohms Min
- 2.5 Operation Temperature: -55 °C to +85 °C

Ordering Information

$$116 - \frac{X}{a} \frac{X}{b} \frac{X}{c}$$

a. Type

- 1: A(Close 6.4mm) Type,2Pin
- 2: B(Open 6.0mm) Type,2Pin
- 3: C(Open 4.5mm) Type,2Pin
- 4: D(Handle 13.5mm) Type,2Pin
- 5: E(Close 8.1mm) Type,3Pin
- 6: F(Open 8.0mm) Type,2Pin

b. Contact Plating

- 1: 5u" Gold flash full gold
- 2: 10u" Gold flash full gold
- 3: 15u" Gold flash full gold
- 4: 30u" Gold flash full gold
- 5: 50u" Gold flash full gold
- 6: Gold flash full gold(standard)
- 7: Full tin

c. Insulator Color

- 0: Black(standard)
- 1: White
- 2: Red
- 3: Yellow
- 4: Green
- 5: Blue

DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> MM ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS      ANGLES X    ±0.38 [0.015]    X°   ±3° .X   ±0.25 [0.010]    .X°   ±10° .XX ±0.13 [0.005]		DRAWN BY AND DATE JUSTIN XING 03-22-08	
MATERIAL		CHECKED BY AND DATE JUSTIN XING 03-22-08	
FINISH		APPROVED BY AND DATE MICHAEL HUANG 03-22-08	
		THIRD ANGLE PROJECTION	
		SCALE: 2 : 1	SIZE: A3



**Y-S ELECTRONIC CO., LTD.**  
 No. 101, Sec. 1, Long-An Street,  
 Lu-Chu, Taoyuan, Taiwan, R.O.C.  
 TEL: +886-3-3609819 FAX: +886-3-3609817

TITLE 116 SERIES MINI JUMPER 2.54MM (0.100")	
DRAWING NO. 116-XXX	REV A
FILE NO.	SHEET 1 OF 1